


UPN Balk

Toleranties: EN 10279: 2000

Profiel	Voorraad (rode menie)	Voorraad (blank)	Handelsgewicht (kg/m)	Dimensies					
				H	B	Tw	Tf	R1	R2
UPN80	✓		8,80	80	45	6,0	8,0	8,00	4,00
UPN100	✓		10,80	100	50	6,0	8,5	8,50	4,50
UPN120	✓		13,60	120	55	7,0	9,0	9,00	4,50
UPN140	✓		16,32	140	60	7,0	10,0	10,00	5,00
UPN160	✓		19,20	160	65	7,5	10,5	10,50	5,50
UPN180	✓		22,40	180	70	8,0	11,0	11,00	5,50
UPN200	✓		25,76	200	75	7,5	1,5	11,50	6,00
UPN220	✓		29,92	220	80	9,0	12,5	12,50	6,50
UPN240	✓		33,85	240	85	9,5	13,0	13,00	6,50
UPN260	✓		38,65	260	90	10,0	14,0	14,00	7,00
UPN280	✓		42,65	280	95	10,0	15,0	15,00	7,50
UPN300	✓		47,05	300	100	10,0	16,0	16,00	8,00
UPN320			60,65	320	100	14,0	17,5	17,50	8,75
UPN350			61,85	350	100	14,0	16,0	16,00	8,00
UPN380			64,32	380	102	13,5	16,0	16,00	8,00
UPN400			73,20	400	110	14,0	18,0	18,00	9,00

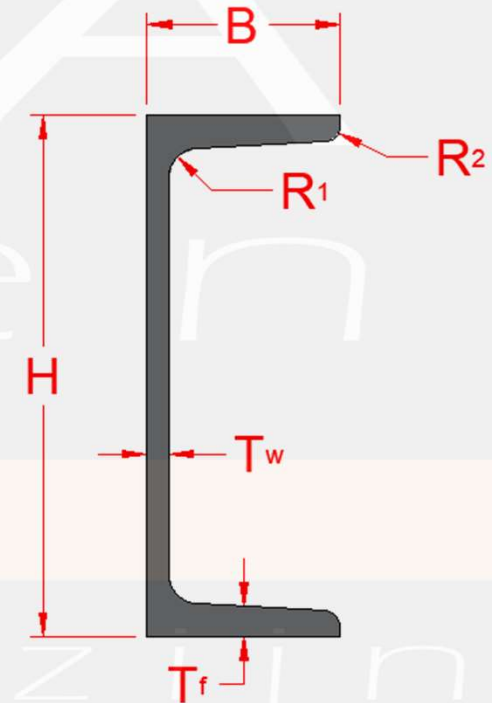

✓ is op voorraad in staalsoort S235, andere profielen zijn verkrijgbaar op bestelling



Metaleuven ijzermagazijn

Aarschotsesteenweg 106

B-3012 Wilsele

ijzermagazijn@metaleuven.be

Openingstijden:

Maandag tot donderdag

8:00 tot 12:00 - 12:30 tot 16:30

Vrijdag

8:00 tot 12:00 - 12:30 tot 14:30