


## HEA Balk

Toleranties: EN 10034: 1993

De afmetingen in deze tabel zijn gebaseerd op de vroegere norm EU 53-62.

Profiel	Voorraad (rode menie)	Voorraad (blank)	Handelsgewicht (kg/m)	Dimensies				
				H	B	Tw	T <sub>f</sub>	R
HEA100	✓		16,99	96	100	5,0	8,0	12
HEA120	✓		20,27	114	120	5,0	8,0	12
HEA140	✓		25,13	133	140	5,5	8,5	12
HEA160	✓		31,02	152	160	6,0	9,0	15
HEA180	✓		36,2	171	180	6,0	9,5	15
HEA200	✓		43,06	190	200	6,5	10,0	18
HEA220	✓		51,47	210	220	7,0	11,0	18
HEA240	✓		61,47	230	240	7,5	12,0	21
HEA260	✓		69,46	250	260	7,5	12,5	24
HEA280	✓		77,81	270	280	8,0	13,0	24
HEA300	✓		90,02	290	300	8,5	14,0	27
HEA320			99,49	310	300	9,0	15,5	27
HEA340			106,78	330	300	9,5	16,5	27
HEA360			114,21	350	300	10,0	17,5	27
HEA400			127,18	390	300	11,0	19,0	27
HEA450			142,42	440	300	11,5	21,0	27
HEA500			158,03	490	300	12,0	23,0	27
HEA550			169,41	540	300	12,5	24,0	27
HEA600			181,17	590	300	13,0	25,0	27
HEA650			193,31	640	300	13,5	26,0	27
HEA700			208,38	690	300	14,5	27,0	27
HEA800			228,66	790	300	15,0	28,0	30
HEA900			256,42	890	300	16,0	30,0	30
HEA1000			277,48	990	300	16,5	31,0	30

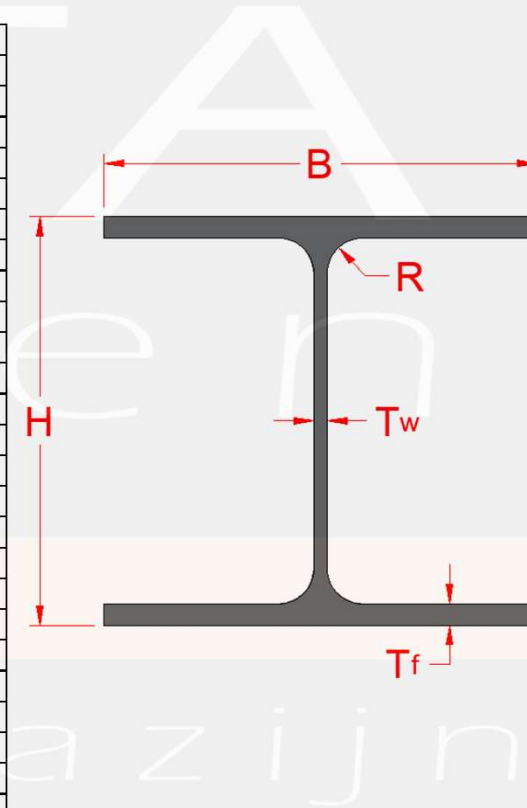

✓ is op voorraad in staalsoort S235, andere profielen zijn verkrijgbaar op bestelling



Metaleuven ijzermagazijn  
Aarschotsesteenweg 106  
B-3012 Wilsele  
[info@ijzermagazijn.be](mailto:info@ijzermagazijn.be)

### Openingstijden:

Maandag tot donderdag

8:00 tot 12:00 - 12:30 tot 16:30

Vrijdag

8:00 tot 12:00 - 12:30 tot 14:30